# Invincible Rack

**Product Guide** 














## BEAM SELECTING























### CAPACITY PER PAIR - BEAM LENGTH (CLEAR SPAN)

BEAM SIZE	48"	60"	72"	84"	92"	96"	108"	120"	144"	LONGER BEAM OPTION
3.0"	IBX-30048	IBX-30060	IBX-30072 5,045#	IBX-30084 3,846#	IBX-30092 3,285#	IBX-30096 3,052#	IBX-30108 2,494#	IBX-30120 2,083#	IBX-30144 1534#	CALL
3.5"	IBX-35048	IBX-35060	IBX-35072 6,246#	IBX-35084 5,133#	IBX-35092 4,363#	IBX-35096 4,044#	IBX-35108 3,282#	IBX-35120 2,729#	IBX-35144 1,989#	CALL
4.0"	IBX-39048	IBX-39060	IBX-39072 7,162#	IBX-39084 6,261#	IBX-39092 5,455#	IBX-39096 5,047#	IBX-39108 4,079#	IBX-39120 3,378#	IBX-39144 2,448#	CALL
4.5"	IBX-43048	IBX-43060	IBX-43072 8,055#	IBX-43084 7,022#	IBX-43092 6,486#	IBX-43096 6,111#	IBX-43108 5,000#	IBX-43120 4,062#	IBX-43144 3,000#	CALL
5.0"	IBX-48048	IBX-48060	IBX-48072 9,460#	IBX-48084 8,216#	IBX-48092 7,569#	IBX-48096 7,286#	IBX-48108 6,357#	IBX-48120 5,228#	IBX-48144 3,737#	CALL
5.5"	IBN-55048	IBN-55060	IBN-55072	IBN-55084 11,364#	IBN-55092 10,431#	IBN-55096 10,029#	IBN-55108 8,873#	IBN-55120 7,505#	IBN-55144 5,569#	CALL
6.0"	IBN-60048	IBN-60060	IBN-60072	IBN-60084 12,896#	IBN-60092 11,837#	IBN-60096 11,368#	IBN-60108 10,046#	IBN-60120 8,478#	IBN-60144 6,273#	CALL


Also available 6.0" x 144" (capacity 7,820)

BEAM

- Maximum deflection Beam length (in.) divided by 180.
- NOTES
- **Meets R.M.I\* standard.** (\*R.M.I.=Racks Manufacturers Institute)

# UPRIGHT FRAME SELECTING

- Standard color: green uprights & orange beams (other colors available).
- Beams and uprights constructed of HSLA prime, U.S. made high-strength steel. ASTM A1011-GR55.
   (Documented verification available on request.)
- High quality polyurethane paint. Environmentally safe.
   Does not contain lead.
- Guaranteed shipping program. Quick-ship available on selected standard items.
- · Engineering available for seismic requirements.



### INVINCIBLE® UPRIGHT FRAME HEIGHTS

DEPTH	8ft.	10ft.	12ft.	14ft.	15ft.	16ft.	20ft.	24ft.	30ft.	36ft.	40ft.	46ft.
36"	IU18 360-096	IU18 360-120	JU18 360-144	IU18 360-168	IU18 360-180	JU18 360-192	JU18 360-240		2			
	1U24 360-096	IU24 360-120	IU24 360-144	1U24 360-168	IU24 360-180	IU24 360-192	1U24 360-240	IU24 360-288	1U24 360-360	1U24 360-432	1U24 360-480	1U24 360-552
	1U29 360-096	1U29 360-120	1U29 360-144	1U29 360-168	IU29 360-180	1U29 360-192	IU29 360-240	IU29 360-288	1U29 360-360	IU29 360-432	1U29 360-480	1U29 360-552
	IU35 360-096	IU35 360-120	IU35 360-144	IU35 360-168	IU35 360-180	IU35 360-192	IU35 360-240	IU35 360-288	IU35 360-360	IU35 360-432	1U35 360-480	IU35 360-552
	IU38 360-096	IU38 360-120	IU38 360-144	1U38 360-168	IU38 360-180	IU38 360-192	IU38 360-240	IU38 360-288	IU38 360-360	IU38 360-432	1U38 360-480	IU38 360-552
42"	IU18 420-096	IU18 420-120	IU18 420-144	JU18 420-168	IU18 420-180	IU18 420-192	IU18 420-240					
	IU24 420-096	IU24 420-120	IU24 420-144	1U24 420-168	IU24 420-180	IU24 420-192	IU24 420-240	IU24 420-288	IU24 420-360	IU24 420-432	IU24 420-480	IU24 420-552
	IU29 420-096	IU29 420-120	IU29 420-144	IU29 420-168	IU29 420-180	IU29 420-192	IU29 420-240	IU29 420-288	IU29 420-360	IU29 420-432	1U29 420-480	IU29 420-552
	IU35 420-096	IU35 420-120	IU35 420-144	IU35 420-168	IU35 420-180	IU35 420-192	IU35 420-240	IU35 420-288	IU35 420-360	IU35 420-432	IU35 420-480	IU35 420-552
	IU38 420-096	IU38 420-120	IU38 420-144	IU38 420-168	IU38 420-180	IU38 420-192	IU38 420-240	IU38 420-288	IU38 420-360	IU38 420-432	1U38 420-480	IU38 420-552
48"	JU18 480-096	IU18 480-120	IU18 480-144	IU18 480-168	IU18 480-180	JU18 480-192	IU18 480-240	-				<del></del>
	1U24 480-096	IU24 480-120	IU24 480-144	IU24 480-168	IU24 480-180	IU24 480-192	IU24 480-240	IU24 480-288	IU24 480-360	IU24 480-432	1U24 480-480	IU24 480-552
	1U29 480-096	1U29 480-120	IU29 480-144	1U29 480-168	IU29 480-180	IU29 480-192	IU29 480-240	IU29 480-288	IU29 480-360	IU29 480-432	IU29 480-480	IU29 480-552
	IU35 480-096	IU35 480-120	IU35 480-144	IU35 480-168	IU35 480-180	IU35 480-192	IU35 480-240	IU35 480-288	IU35 480-360	IU35 480-432	1U35 480-480	IU35 480-552
	IU38 480-096	IU38 480-120	IU38 480-144	IU38 480-168	IU38 480-180	IU38 480-192	IU38 480-240	IU38 480-288	IU38 480-360	IU38 480-432	1U38 480-480	IU38 480-552

Other upright depths and heights available

## CAPACITIES



# INVINCIBLE® RACK CAPACITIES

The table below has been calculated in accordance with the RMI "Specification for the Design, Testing and Utilization of Industrial Steel Storage Racks" and the edition of the AISI "Specification for the Design of Cold-Formed Steel Structural Members".


#### HORIZONTAL AND DIAGONAL BRACING

All upright frames use reinforced 1-1/2" wide closed-lip, horizontal and diagonal bracing to resist damage in transit and from fork lift abuse. 1" x 1-1/2" horizontal bracing is placed approximately 8" from the floor to help resist impact damage and allow ease in lagging foot plate to floor.

#### UPRIGHTS




Bracing channel with reinforcing rib



- For vertical beam spacing greater than 96", please contact your distributor.
- Shelf spacing is measured from the floor to the top of the first beam or the maximum shelf spacing (whichever is greater).
- For more information on additional upright frame configurations please contact your Regional Manager or Inside Sales at 800-438-5629



Complies with current RMI Engineering Standards.

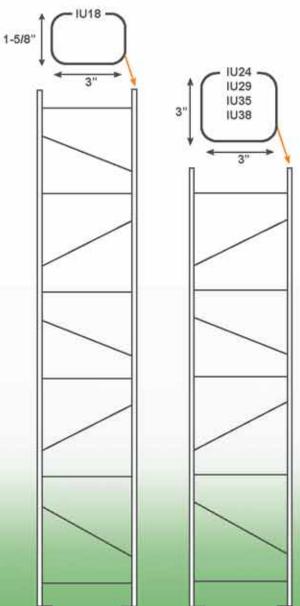





Our Beams Fit Both Tear Drop Styles of Upright

(Provided same beam manufacturer used in same bay)

#### **Rack Structures**

From catwalks to rack-supported mezzanines to full pick modules and structures, Husky Rack & Wire can engineer and design a material handling system to suit almost any need. Please contact our Project Management Staff or your Regional Manager for assistance.



Husky Rack & Wire makes continuous improvements in all its products. We reserve the right to change specifications without notice. Photos and illustrations may contain standard and optional equipment.

#### Warranty Information

For warranty information applicable to all our products, refer to the Husky Rack & Wire Terms and Conditions of Sale, which are accessible at www.huskyrackandwire.com/terms\_and\_conditions.html

## ACCESSORIES

#### **RIGID WALL SPACER**



Distance between wall and back of upright frame

3" WSIN03 6" WSIN06 9" WSIN09 12" WSIN12 18" WSIN18

Furnished with necessary bolts & nuts.

Connects and rigidly holds racks at set spacing
Recommended when upright height is more
than six times depth.

#### **ANCHORING BOLT**



Size

Catalog Number

133536

1/2" x 4-3/4"

#### \_\_\_

Catalog

Number



#### SERIES 1000 WATERFALL CROSSBAR



Upright frame depth

depth Number 36" A1036G 42" A1042G 48" A1048G

#### **ROW SPACER**



Distance between upright frames (back to back)

(to back) Number RSIN03

Catalog

6" RSIN06 9" RSIN09 12" RSIN12

12" RSIN12 18" RSIN18 24" RSIN24

Furnished with necessary bolts & nuts. Connects and rigidly holds racks at set spacing Recommended when upright height is more than six times depth.

#### **BASE PLATE SHIM**



Size Standard 4" x 4-1/4" x 10 GA Catalog Number **FP001** 

#### AISLE SHIELD



#### **RACK GUARD**



#### **WIRE DECK**







Ches # 16508 5/14







## Invincible Rack

### **Product Guide**



Destin, FL Office (850)424-5779

Pensacola, FL Office (850)433-9610

## Pallet Rack • Wire Partitions • Guarding

Wireway Husky Corp., one of the largest producers of material handling products in the country, is based in Denver, N.C. Its Husky ® products include pallet racks, welded wire-deck, cable reel racks and pallet rack guarding systems. Additionally a whole range of security wire partition products are produced and marketed under the 'Wireway ®' brand name.



When you absolutely have to have it shipped in 48 hours or better.
On ONE shipment - from One location Come Home to the 'Original', 49 Years ... and still the only Guaranteed Quick Ship Program coast to coast.







View Product